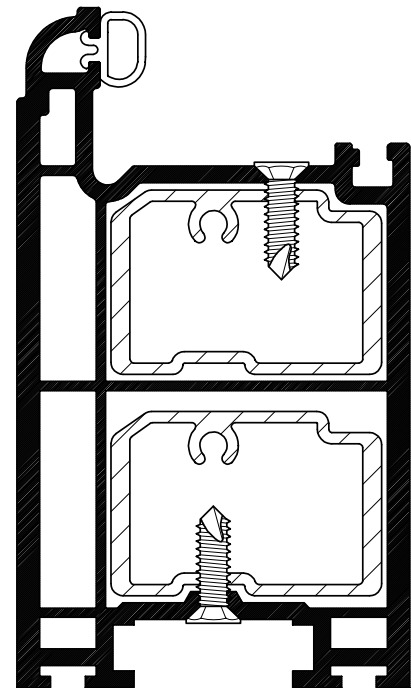
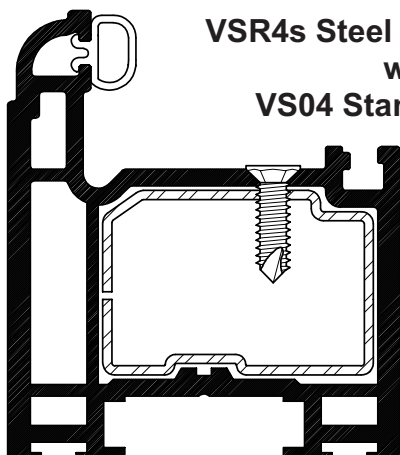
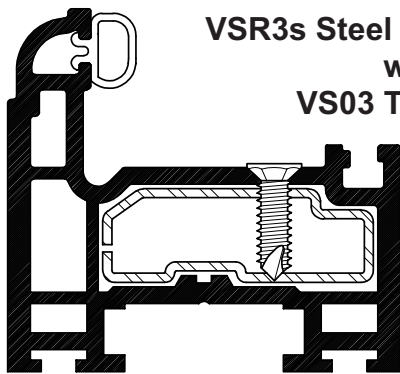
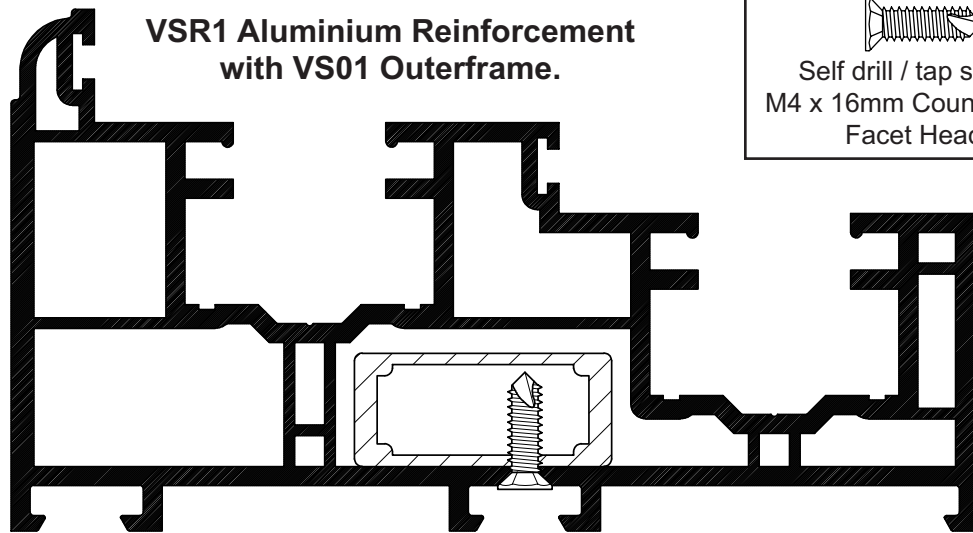

REINFORCEMENT

Reinforcement Location & Fixing Points.

Reinforcement should be secured to the PVC-U profile at a maximum of 100mm from the ends of the reinforcement and then at a maximum of 400mm centres (300mm when using foiled profiles). The recommended screws are self drilling, M4 flat faceted head, TEKS point screws.



VSR4s Steel Reinforcement with VS05 Bottom Rail.