

---

# HARDWARE PREPARATION

---

## Routing Details for Trickle Vents


Trickle vents can be fitted through the head of the top sash. The VS03 sash will accommodate vent slots up to 10mm only. If wider slots are required i.e. to achieve 8000mm sq free area then the top sash must be made using the VS04 sash profile. Alternatively there are many glazed in vents available to suit any air flow specification that can be used with any sash profile.

Where 'trickle' vents are to be fit to the head section, reinforcement should be broken around routed area to allow ventilation.

**Note:** Glazed in vents will affect the glass size and may affect the sash weight. Consult the balance supplier for advise.

### For Vent Slots up to 10mm

### For Vent Slots up to 18mm

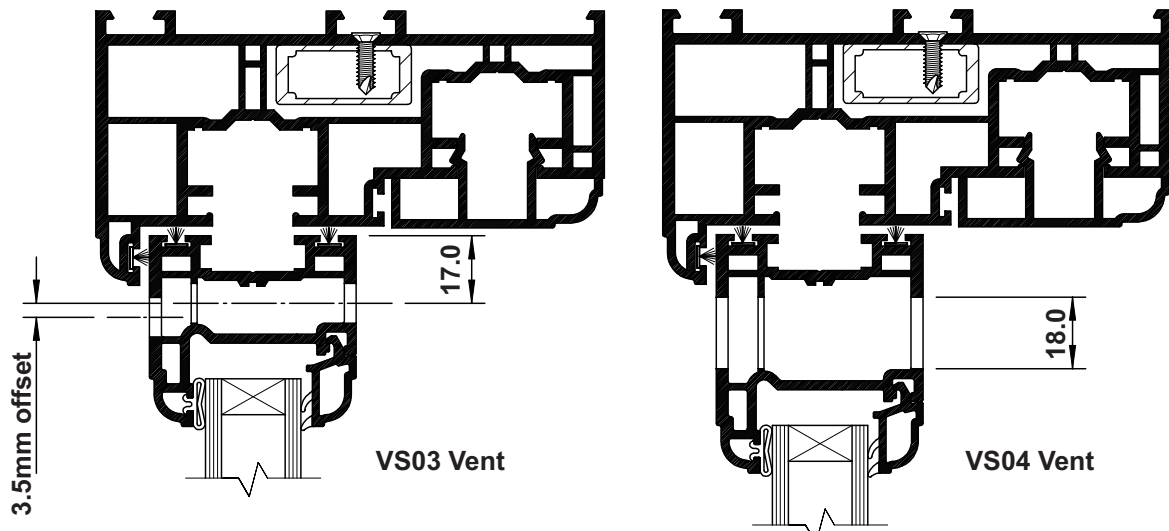

### Section showing Typical Glazed in Vent system

